

# HSM V-Press 818



## Vertikale Ballenpresse HSM V-Press 818

Dank einer sehr geringen Transporthöhe kann die HSM V-Press 818 problemlos zu jedem Einsatzort transportiert werden.

### Technical data

<b>Order number:</b>	6050214	<b>Bale length x Bale width x Bale height:</b>	1200 x 700 x 780 mm
<b>EAN</b>	4026631080514	<b>Bale weight:</b>	200 kg
<b>Pressing power:</b>	185 kN	<b>Method of loading:</b>	manual
<b>Specific pressing power:</b>	19,23 N/cm <sup>2</sup>	<b>Width x Depth x Height:</b>	1709 x 1248 x 2370 mm
<b>Driving power:</b>	4 kW	<b>Weight:</b>	1210 kg
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Related product line:</b>	V-Press
<b>Cycle time when idling vacío:</b>	27 s	<b>Type of consumables:</b>	Strapping tape
<b>Volume throughput in idle operation (theor.):</b>	5 m <sup>3</sup> /h	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing
<b>Loading height:</b>	958 mm		
<b>Loading aperture width x height:</b>	1195 x 540 mm		

### Product information



To fill the press, the upper half of the doors is pushed down and automatically opens after the compression process



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Low installation height and small footprint

# HSM®




### Compresses cardboard and film

Suitable for cardboard as well as film.



### Automatic start

Automatic start of the pressing process after closing the door.

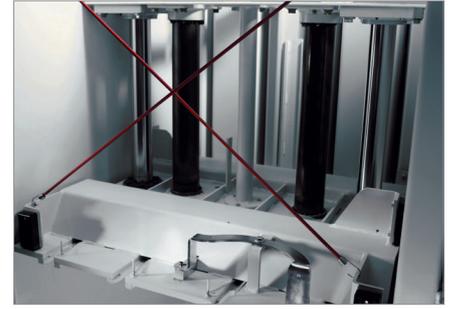

### Optimized pressing

Massive press ram and extremely robust press plate guidance.



### Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.




### HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.



### Strapping

Manual bale strapping with continuous polyester tape.

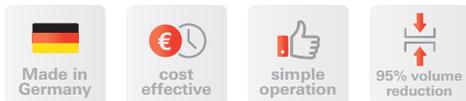

[www.tuev-sued.de/ps-zert](http://www.tuev-sued.de/ps-zert)



HSM V-Press 605,  
610



HSM V-Press 818,  
820, 825



[www.hsm.eu](http://www.hsm.eu)