

# HSM V-Press 860 plus B



## Vertikale Ballenpresse HSM V-Press 860 plus B

Mit einer Presskraft von 594 kN und einer geräuscharmen und energiesparenden Technologie ist die HSM V-Press 860 plus B die wirtschaftliche und umweltgerechte Lösung für Ihre Entsorgungsaufgaben.

### Technical data

<b>Order number:</b>	6058214	<b>Bale length x Bale width x Bale height:</b>	1500 x 1200 x 780 mm
<b>EAN</b>	4026631080064	<b>Bale weight:</b>	550 kg
<b>Pressing power:</b>	594 kN	<b>Method of loading:</b>	manual
<b>Specific pressing power:</b>	50,76 N/cm <sup>2</sup>	<b>Width x Depth x Height:</b>	2099 x 1245 x 2985 mm
<b>Driving power:</b>	4 kW	<b>Weight:</b>	2340 kg
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Related product line:</b>	V-Press
<b>Cycle time when idling vacío:</b>	25 s	<b>Type of consumables:</b>	Wire, Pre-looped wire
<b>Volume throughput in idle operation (theor.):</b>	32,5 m <sup>3</sup> /h	<b>Press material:</b>	Plastic film, Cardboard
<b>Loading height:</b>	1129 mm		
<b>Loading aperture width x height:</b>	1500 x 651 mm		

### Product information



Produces particularly large, high density bales which can be sold with no further compression required



To fill the press, the upper half of the doors is pushed down and automatically opens after the compression process



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



### Compresses cardboard and film

Suitable for cardboard as well as film.



### Automatic start

Automatic start of the pressing process after closing the door.



### Economical, fast and silent

The HSM V-Presses are highly energy efficient thanks to the specially developed rapid stroke technology. This saves time and money.




### Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



### HSM TCS

HSM TCS (TorsionControlSystem) for monitoring press ram movement.

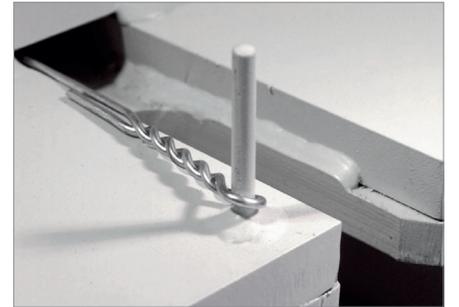

### Strapping

Strapping with wire – optional tape station available for strapping with polyester tape or wire according to requirements.



[www.tuev-sued.de/ps-zert](http://www.tuev-sued.de/ps-zert)

[www.hsm.eu](http://www.hsm.eu)

**HSM**®