

HSM V-Press 610 P

HSM V-Press 610 P vertical baling press

The vertical baling press is specially designed for the compression of opened or perforated PET/UBC bottles and beverage cans.



Technical data

Order number:	6110204	Bale length x Bale width x Bale height:	800 x 800 x 600 mm
EAN	4026631083058	Noise level (idle operation):	ca. 60 dB(A)
Pressing power:	120 kN	Width x Depth x Height:	1192 x 1058 x 1986 mm
Specific pressing power:	25 N/cm ²	Weight:	540 kg
Voltage / Frequency:	400 V / 50 Hz	Related product line:	V-Press
Cycle time when idling vacío:	22 s	Type of consumables:	Strapping tape
Volume throughput in idle operation (theor.):	6,25 m ³ /h	Press material:	PET bottles, aluminium beverage cans, soft packaging, Plastic film, Mixed paper, Cardboard, Punch waste/residue, PET, Beverages and aluminum cans
Loading height:	656 mm		
Loading aperture width x height:	800 x 488 mm		

Product information



Special retaining claws optimize the compression of the pressing material.



Compacts PET and beverage cans



Simple loading thanks to the filling flap at a convenient working height.




Retaining claws

Special retaining claws optimize the compression of the pressing material.



Automatic start

Automatic start of the pressing process after closing the door.

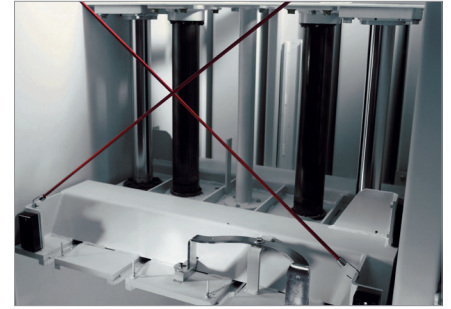

Optimized pressing

Massive press ram and extremely robust press plate guidance.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



HSM TCS

HSM TCS (TorsionControlSystem) for monitoring press ram movement.

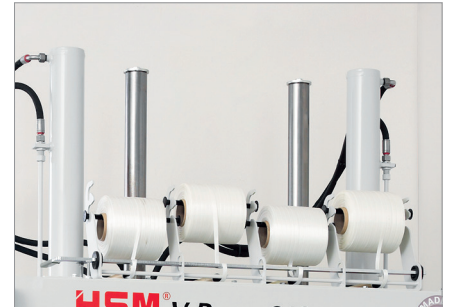

Strapping

Manual bale strapping with continuous polyester tape.



Made in Germany



cost effective



simple operation



95% volume reduction



www.tuev-sued.de/ps-zert



www.hsm.eu

HSM®