



# HSM ProfiPack P425

## HSM ProfiPack P425 packaging machine

This robust and performance-optimised packaging machine is used to process a number of layers of cardboard into a padding mat or padded filling material. The professional device is mobile on steering rollers and can be used with total flexibility.

### Technical data

<b>Order number:</b>	1531054	<b>Loading height:</b>	20 mm
<b>EAN</b>	4026631062602	<b>Noise level (idle operation):</b>	ca. 60 - 62 dB(A)
<b>Throughput capacity:</b>	80 kg/h	<b>Width x Depth x Height:</b>	770 x 611 x 1040 mm
<b>Power consumption:</b>	2000 W	<b>Weight:</b>	165 kg
<b>Voltage / Frequency:</b>	220-240 V / 50-60 Hz		
<b>Intake width:</b>	425 mm		

### Product information



Integrated connection for dust suction (dust extractor optionally available).



When the emergency stop switch is actuated, the device stops immediately.



The high efficiency of the drive enables a particularly sustainable operation of the device.



### High-quality packaging material

The packaging material can be used wherever required and provides an optimum protection for objects.



### Continuous operation

Powerful drive allows continuous operation.




### Working width as required

The infinitely variable adjustment of the working width with a scale allows the production of cushioning material exactly as required.



### Intuitive controls

The intuitive operator control panel with LED indicators on a robust keypad signals the operating status of the device.

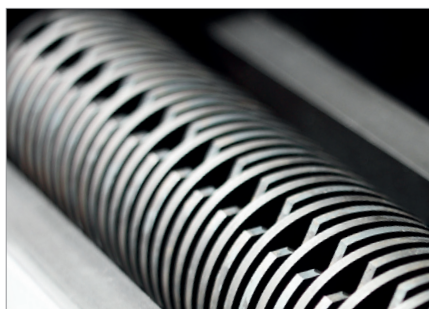


### Specially hardened solid steel cutting rollers

The induction-hardened solid steel cutting rollers are wear-resistant against cardboard staples and guarantee durability.



### Variable cushioning volume

Depending on the application, the cushioning volume of the packaging material can be adjusted as required.



\*HSM ProfiPack P425



\*HSM ProfiPack C400, P425 (Wechselstrom / alternating current)  
\*\*HSM ProfiPack P425 (Wechselstrom / alternating current)

[www.hsm.eu](http://www.hsm.eu)

**HSM®**