

HSM ProfiPack P425



Verpackungspolstermaschine HSM ProfiPack P425

Diese robuste und leistungsoptimierte Verpackungspolstermaschine verarbeitet in einem Arbeitsschritt mehrere Lagen ausgedienter Kartonagen zu Polstermatten oder aufgepolstertem Füllmaterial. Das Profi-Gerät ist mobil auf Lenkrollen und flexibel einsetzbar.

Technical data

Order number:	1533054	Loading height:	20 mm
EAN	4026631072724	Noise level (idle operation):	ca. 63 - 64 dB(A)
Throughput capacity:	120 kg/h	Width x Depth x Height:	770 x 611 x 1040 mm
Power consumption:	3800 W	Weight:	186 kg
Voltage / Frequency:	400 V / 50 Hz		
Intake width:	425 mm		

Product information



Integrated connection for dust suction (dust extractor optionally available).



When the emergency stop switch is actuated, the device stops immediately.



The high efficiency of the drive enables a particularly sustainable operation of the device.



High-quality packaging material

The packaging material can be used wherever required and provides an optimum protection for objects.



Continuous operation

Powerful drive allows continuous operation.




Working width as required

The infinitely variable adjustment of the working width with a scale allows the production of cushioning material exactly as required.



Intuitive controls

The intuitive operator control panel with LED indicators on a robust keypad signals the operating status of the device.

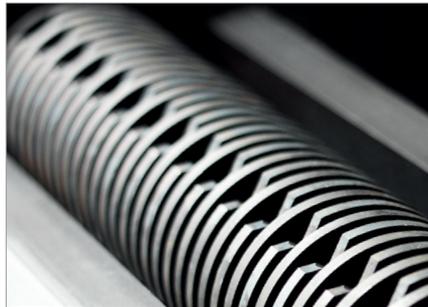

Specially hardened solid steel cutting rollers

The induction-hardened solid steel cutting rollers are wear-resistant against cardboard staples and guarantee durability.



Variable cushioning volume

Depending on the application, the cushioning volume of the packaging material can be adjusted as required.



*HSM ProfiPack P425



*HSM ProfiPack C400, P425 (Wechselstrom / alternating current)
**HSM ProfiPack P425 (Wechselstrom / alternating current)
***HSM ProfiPack P425 (Drehstrom / three-phase current)