



# HSM VK 1210

## Channel baling press HSM VK 1210

For industrial applications with small material loads - Troughput up to approx. 117 m³/h

### Technical data

<b>Order number:</b>	6617001	<b>Loading aperture width x Loading aperture length:</b>	670 x 1000 mm
<b>Pressing power:</b>	159 kN	<b>Bale width x Bale height x Bale length:</b>	750 x 500 x 600-1200 mm
<b>Specific pressing power:</b>	42,4 N/cm²	<b>Length x Width x Height:</b>	5940 x 2700 x 1940 mm
<b>Driving power:</b>	9,2 kW	<b>Weight:</b>	3,8 t
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Type of consumables:</b>	Wire
<b>Cycle time when idling vacío:</b>	11,5 s	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard, Punch waste/residue, PET beverage and aluminium cans, soft packaging, PET
<b>Volume throughput in idle operation (theor.):</b>	117 m³/h		
<b>Volume throughput at 50kg/m³ (theor.):</b>	5.85 t/h		

### Product information



Suitable for continuous loading with conveyor belt, air feeding or similar



Particularly suitable for cardboard, plastic film and PET bottles




Loading aperture of 1000 mm suitable for larger material pieces and higher throughput rates



### System solution

Integration into automated industrial production processes.

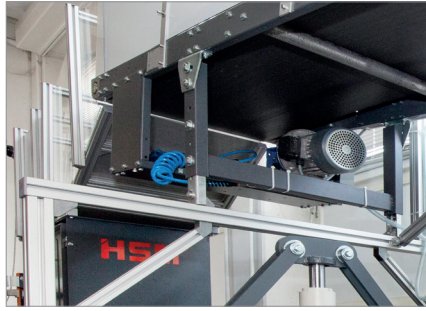

### Continuous loading

Suitable for continuous loading with conveyor belt, air feeding or similar.



### Compact bales

The bales can be stacked and are easy to transport.



### Automatic operation

Control of the pressing process via light barrier.



### Operating side

Can be fully integrated into existing workflows and processes. Operating side can be selected.



### Sturdy design

Very low space requirement thanks to compact and sturdy design.

